

Wireless Data Logger RTR-5 Series Options




Options

unit: millimeters

Data Logger


Wall Attachment: TR-05K3

Double-sided Adhesive tape x 1
Lock Screw x 2
Materials: Polycarbonate




Wall Attachment: TR-05K3L

Double-sided Adhesive tape x 1
Lock Screw x 2
Materials: Polycarbonate



Maintenance Set: TR-00P1

Rubber Packing x 1
Silica Gel x 1
Double-sided Adhesive Tape x 1
Lock Screw x 2

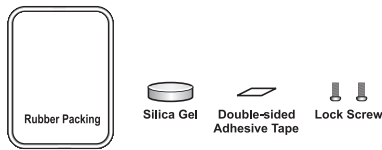

Battery Set for Low-Temperature use: TR-11P2

Lithium battery SAFT (LS14250) x 1
Tube x 1
Maintenance Set x 1




External Power Adaptor Kit: RTR-05A1

Voltage Input: DC6V
Back-up Power: Ni-MH Battery (In case of power loss)
Back-up Time: 4 days (*1)
Charging Method: Trickle Charge
Operating Temperature: 0 to 60°C
Waterproof Capacity: None
Weight: about 37g (without AC Adaptor)

Kit Contents:

External Power Adaptor x 1
AC Adaptor (AD-0604) x 1
Attachment hook x 1
Rubber Packing x 1 (for back of main unit)
Rubber Packing (small) x 1 (for AC Adaptor jack)
Silica Gel Pack (drying agent) x 1
Double-sided Adhesive Tape x 1 (for fastening Silica Gel)
Screws x 2 (extras for fastening back of main unit)

Install by taking off the back cover and removing the battery.

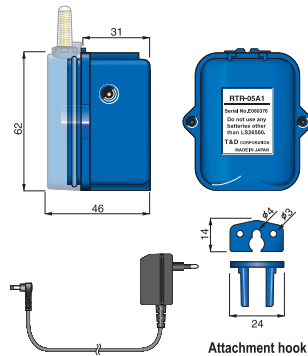

Large Capacity Battery Adaptor Kit: RTR-05B1


Power: Lithium Battery x 1 (LS26500)
Battery Life: about 2 years and 6 months (*1)
(Monitoring at 1 minute interval = about 20 months)
Waterproof Capability: Splash proof
Operating Temperature: -40 to 80°C (*2)
Weight: about 75g (including Lithium Battery)

Kit Contents:

Large Capacity Battery Adaptor x 1
Attachment hook x 1
Rubber Packing x 1 (for back of main unit)
Silica Gel Pack (drying agent) x 1
Double-sided Adhesive Tape x 1 (for fastening Silica Gel)
Screws x 2 (extras for fastening back of main unit)

Install by taking off the back cover and removing the battery.


When using RTR-05B1, it is necessary to purchase Lithium Battery (LS26500).
For details, contact your local representative or dealer.

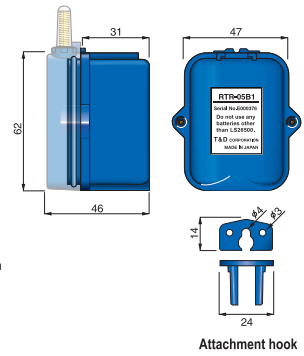

RTR-57U


Serial Communication Cable: TR-4C10

Cable Length: 1.0m
Compatible Models: VR-71



Serial Communication Cable: TR-6C10


Cable Length: 1.0m
Compatible Models: TR-71U/72U



RTR-57U / RTR-50


Serial Communication Cable: TR-07C

Cable Length: 1.5m



USB Communication Cable: US-15C

Cable Length: 1.5m



AC-Adaptor: AD-0604


Cable Length: 1.85m



RTR-5W


Wall Attachment: TR-5WK1

Double-sided Adhesive Tape x 1
Materials: Polycarbonate



AC-Adaptor: AD-0607

Cable Length: 1.85 m



NOTE:

(*1) Battery Life varies depending on measuring environment, recording interval, transmission frequency, and ambient temperature. The battery life estimated here is calculated using a new battery under normal operating conditions and in no way should be understood as a guarantee of battery life.

(*2) Operating temperature depends on the specifications for the data logger being used.

Option Sensors


unit: millimeters

RTR-57U

Possible Temperature Measurement Range: -60 to 155°C Sensor Temperature Resistance: -70 to 180°C
Temp Measurement Accuracy: Average $\pm 0.3^\circ\text{C}$ (-20 to 80°C) Average $\pm 0.5^\circ\text{C}$ (-40 to -20 / 80 to 110°C) Average $\pm 1.0^\circ\text{C}$ (-60 to -40°C / 110 to 155°C)
Materials: ①Thermistor ②Stainless pipe (SUS316) ③Fluoropolymer-Coated Compaction Tube ④Fluoropolymer-Coated Electrical Wire ⑤Vinyl Coated Electrical Wire ⑥Fluoropolymer-Coated Mold


Fluoropolymer-Coated Sensor: TR-5106

Cable Length: 0.6m
Thermal Time Constant:
Approx. 30 Sec. (in air)
Approx. 4 Sec. (in agitated water)




Fluoropolymer-Coated Sensor: TR-5101

Cable Length: 45mm
Thermal Time Constant:
Approx. 30 Sec. (in air)
Approx. 4 Sec. (in agitated water)




Stainless Protection Sensor: TR-5220

Cable Length: 2.0m
Thermal Time Constant:
Approx. 36 Sec. (in air)
Approx. 7 Sec. (in agitated water)




Stainless Protection Sensor: TR-5320

Cable Length: 2.0m
Thermal Time Constant:
Approx. 12 Sec. (in air)
Approx. 2 Sec. (in agitated water)




Stainless Protection Sensor: TR-5420

Cable Length: 2.0m
Thermal Time Constant:
Approx. 12 Sec. (in air)
Approx. 2 Sec. (in agitated water)




Water Immersible Sensor: TR-5530

Cable Length: 3.0m
Thermal Time Constant:
Approx. 120 Sec. (in air)
Approx. 6 Sec. (in agitated water)



Sensor Extension Cable: TR-2C30

Cable Length: 3.0m
Splash Resistant (IP64)




NOTE:
Only one cable per sensor. An error of about $+0.3^\circ\text{C}$ occurs at normal temperature while an error of about $+0.5^\circ\text{C}$ will occur at around -50°C .

RTR-53A

Materials: ①Temperature/Humidity Sensor ②Polypropylene Resin ③Vinyl Coated Electrical Wire

Temp / Humidity Sensor: TR-3310

Cable Length: 1.0m Possible Temperature Measurement Range: 0 to 55°C
Possible Humidity Measurement Range: 10 to 95%RH Sensor Temperature Resistance: -10 to 60°C
Sensor Response Time: About 7 min. (90% response) Temp Measurement Accuracy: Average $\pm 0.3^\circ\text{C}$
Humidity Measurement Accuracy: $\pm 5\% \text{RH}$ (At 25°C 50%RH)
Service Life: 1 year (under normal operational conditions)
Operational Conditions: Without dew condensation, water leakage or effect from corrosive gas or organic solvents.




RTR-52Pt

Materials: ①Vinyl ②Vinyl Coated Wire

Sensor Adaptor Cable: RTR-05Pt

Cable Length: 1.0m Sensor Temperature Resistance: -25 to 60°C
Optional Sensors for the RTR-52Pt can be selected from the Optional Sensors for TR-81.
Moreover, designed for easy compatibility, the RTR-52Pt can be used with any three-wire type Pt100 / Pt1000 temperature sensor.




RVR-52A

Materials: ①M3.5 Crimp Terminal ②Vinyl Coated Electrical Wire ③Connector


Pulse Input Cable: RPR-7101

Cable Length: 1.5m




4-20mA Probe Cable: RVR-5203

Maximum Current Input: MAX40mA
Interior Resistance: 100ohm
Output: 2V at 20mA / 0.4V at 4mA
Conversion Accuracy: 0.5%
Cable Length: 1.5m



Sensor Extension Cable (to Moisture Sensors): VR-2C10


Cable Length: 1.0m



Other Distributors' Products

Sensor Adaptor cable for RTD sensor with M12 connection (IEC 61076-2-101)

Cable Length: 1.0m Water Resistance: IP67



RTD sensor with M12 connector (IEC 61076-2-101)



Sensing element: RTD Pt100 Ohm at $^\circ\text{C}$ to IEC751
Class A or class B type of construction: with densely packed magnesium oxide insulated cable.
Sheat material: AISI 316 s.s.
Temperature range: -50 to 350°C for class A; -50 to 500°C for class A
Response time: less than 6 seconds (test in water to IEC 751, 63% of terminal gap)

Please see this website for details. <http://www.italcoppie.it/>

Option Software

T&D Recorder VLD for Windows: VLD-5EU

In order to comply with FDA 21 CFR Part 11, T&D Recorder VLD for Windows is complete with the following functions.

- Software Operation Password Protection
- Prevention of Data Manipulation via Password
- Recording of Software Operations History

Compatible Devices:

- Data Logger: RTR-51, RTR-52, RTR-53, RTR-51A, RTR-52A, RTR-53A, TR-51A, TR-52
- Data Collector: RTR-57U, RTR-57C
- Communication Port: TR-50C

For details, contact your local representative or dealer.

RTR-5W VLD for Windows: VLD-5WEU

In order to comply with FDA 21 CFR Part 11, RTR-5W VLD for Windows is complete with the following functions.

- Software Operation Password Protection
- Prevention of Data Manipulation via Password
- Recording of Software Operations History

Compatible Devices:

- Data Logger (Remote Unit): RTR-51, RTR-52, RTR-53, RTR-51A, RTR-52A, RTR-53A
- Communication Port (Repeater): RTR-50
- Base Station (Base Unit): RTR-5W

For details, contact your local representative or dealer.

Web Site

Product information, FAQ and software update downloads.

<http://www.tandd.com/>

Colors in the photos in this catalog may be different from real product colors. The specification and designs of the products in this catalog are true as of May 2011. Specifications are subject to change without notice. Microsoft®, Windows® are registered trademarks of Microsoft Corporation USA and other countries. Company names and product names are trademarks or registered trademarks of each company. Pentium® is a registered trademark of the Intel America Corporation.



T&D Corporation

817-1 Shimadachi, Matsumoto, Nagano, Japan 390-0852

Please send your inquiries to:

E-mail : sales@tandd.com

Facsimile : (+81) 263-40-3152

Distributor



PRINTED WITH SOYINK
Trademark of American Soybean Association