

# Solid State Relays for Heaters

G3PJ




- Better temperature characteristics and reinforced insulation for safety standard compliance
- Push-In Plus terminal blocks for easy wiring

## Providing Strong, Slim Alternatives for **Control Panels**

## Easier Designing and Wiring While Maintaining the Previous 22.5-mm Width to Help Save Space

#### Close Mounting Even with this Top-class Slim Design

Size reductions in Solid State Relays mean you can downsize control panels and cooling equipment. And close mounting helps you save even more space.

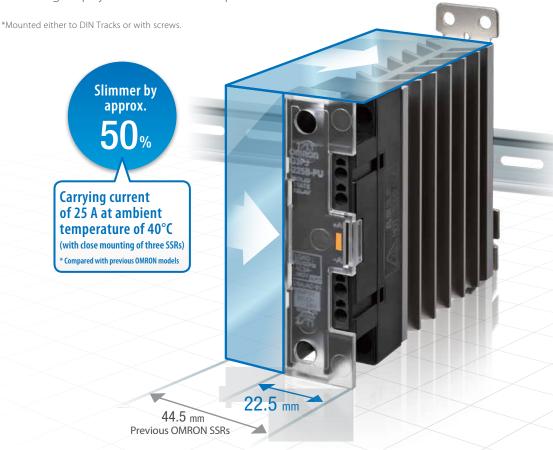

## **Process** rther Evolution **New Value Panels** Control Panels Simple & Easy

### New Value For Control Panels




Control Panels: The Heart of Manufacturing Sites.

Evolution in control panels results in large evolution in production facilities.

And if control panel design, control panel manufacturing processes, and human interaction with them are innovated, control panel manufacturing becomes simpler and takes a leap forward. OMRON will continue to achieve a control panel evolution and process innovation through many undertakings starting with the shared Value Design for Panel concept for the specifications of products used in control panels.

#### Control Panels That Use Many SSRs Can Be Greatly Downsized



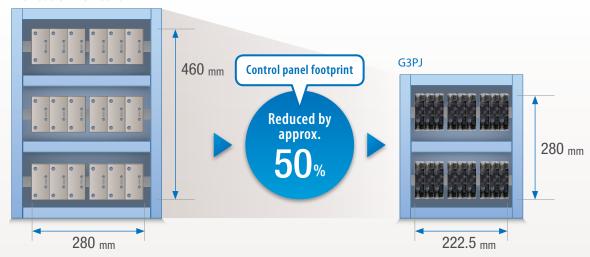

Example: Installation of 18 SSRs constituted for three-phase heaters (6 channels)

#### Better Temperature Characteristics and Reinforced Insulation for Safety **Standard Compliance**

UL-listed components, so you can reduce the time required for the UL application process.

- · You can use new components or upgraded components at any time.
- You can procure the components even when an urgent need arises for adjustments or problem-solving.









#### Push-In Plus Terminal Blocks for Easy Wiring

Just Insert Wires: No Tools Required

Now you can use Push-In Plus terminals to reduce the time and work involved in wiring.

#### **Double Wiring**

Easy crossover wiring for three-phase heaters.




Less work required for wiring

\*SSRs are also available with screw terminals for inputs.

\*Only input terminals use Push-In Plus terminal blocks.



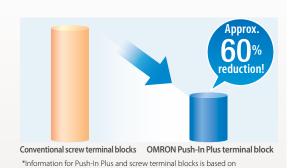


OMRON's actual measurement value data.

#### **Product Lineup**

	Model	Innut voltage	Rated load	Rated load current (ambient temperature of 40°C)		SCCR(UL 508)	Dielectric strength	Input terminal form*
Model		Input voltage	voltage	Close mounting (three SSRs)	Separate mounting			
Panel	G3PJ-215B-PU	- 12 to 24 VDC	24 to 240 VAC	15 A	18 A	- 10 kA	2.5 kV	Push-In Plus terminal block
	G3PJ-225B-PU			25 A	27 A			
	G3PJ-515B-PU		100 to 480 VAC	15 A	23 A		4.0 kV	
	G3PJ-525B-PU			25 A	27 A			
	G3PJ-215B		24 to 240 VAC	15 A	18 A		2.5 kV	Screw terminals
	G3PJ-225B			25 A	27 A			
	G3PJ-515B		100 to 480 VAC	15 A	23 A		4.0 kV	
	G3PJ-525B			25 A	27 A			

<sup>\*</sup>M4 screws are used for the output terminals.

Refer to the G3PJ Solid State Relays for Heaters Datasheet (Cat. No. J210) for details.

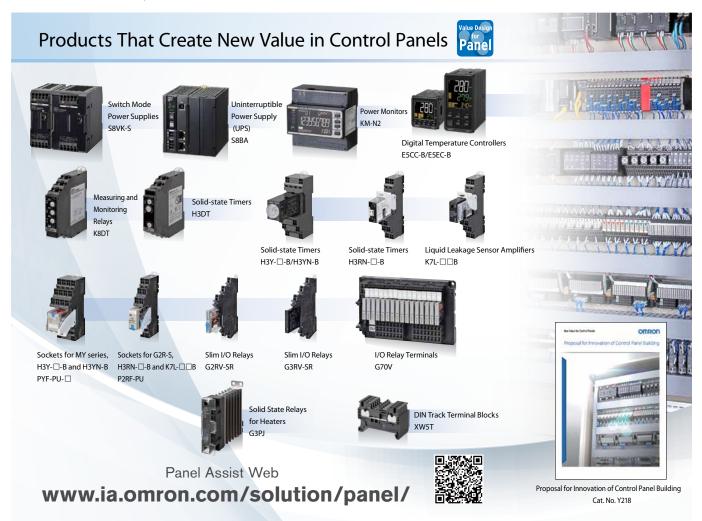

Before you place an order, please read and understand "Agreement for Using the Product" available on Omron's latest "Best control devices Omron", "General Brochure" or Omron's website.

### OMRON Corporation Industrial Automation Company Kyoto, JAPAN

Contact: www.ia.omron.com

### Regional Headquarters OMRON EUROPE B.V.

Wegalaan 67-69, 2132 JD Hoofddorp The Netherlands Tel: (31)2356-81-300/Fax: (31)2356-81-388

#### OMRON ASIA PACIFIC PTE. LTD.

No. 438A Alexandra Road # 05-05/08 (Lobby 2), Alexandra Technopark, Singapore 119967 Tel: (65) 6835-3011/Fax: (65) 6835-2711

#### OMRON ELECTRONICS LLC

2895 Greenspoint Parkway, Suite 200 Hoffman Estates, IL 60169 U.S.A. Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

#### OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower, 200 Yin Cheng Zhong Road, PuDong New Area, Shanghai, 200120, China Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

#### **Authorized Distributor:**

© OMRON Corporation 2016 All Rights Reserved. In the interest of product improvement, specifications are subject to change without notice.

CSM\_1\_1\_0316 Cat. No. J211-E1-01

0316 (0316)